

Construction method of the cost function for the minimax shape optimization problem

Kouhei Shintani¹ and Hideyuki Azegami¹

¹ Nagoya University, A4-2 (780) Furo-cho, Chikusa-ku, Nagoya 464-8601, Japan

E-mail shintani@az.cs.is.nagoya-u.ac.jp

Received April 01, 2013, Accepted June 07, 2013

Abstract

The present paper describes a method by which to formulate a shape optimization problem of a linear elastic continuum for minimizing the maximum value of a strength measure, such as the von Mises stress. In order to avoid the irregularity of the shape derivative of the maximum value, the Kreisselmeier–Steinhauser function of the strength measure is used as the cost function. In the cost function, a parameter is used to control the regularity of the shape derivative. In the present paper, we propose a rule by which to appropriately determine the parameter. The effectiveness of the proposed rule is confirmed through a numerical example of a cantilever problem.

Keywords calculus of variations, boundary value problem, shape optimization, H1 gradient method, Kreisselmeier–Steinhauser function

Research Activity Group Mathematical Design

1. Introduction

In the design of parts of machines or mechanical structures, strength is one of the most important factors. In practice, the maximum von Mises stress is evaluated at all times and all locations for parts constructed from ductile metal, which is modeled as a linear elastic body, and is used as a measure of the strength. Hence, in order to find the optimum shape of a linear elastic body while maximizing the strength, we must construct a shape optimization problem involving the minimization of the maximum von Mises stress, which we refer to as the minimax shape optimization problem. However, this problem is irregular because we cannot define the Fréchet derivative with respect to domain variation, which we refer to as the shape derivative, of the cost function, such as the maximum value of the von Mises stress.

In order to avoid irregularity, the Kreisselmeier–Steinhauser function [1], which is referred to hereinafter as the KS function, with respect to a strength measure such as the von Mises stress has been used instead of the maximum value of a strength measure. We can define the shape derivative of the KS function and obtain a numerical solution by the finite element method, as shown in [2].

However, in the KS function, a parameter $p \in (0, \infty)$ is used to control the regularity of the shape derivative of the KS function. When $p \rightarrow \infty$, the value of the KS function approaches the maximum value of the strength measure, while the regularity worsens simultaneously. Actually, convergence phenomena are affected by the value of p . An appropriate value of p has been determined empirically.

In the present paper, we propose a rule by which to determine the value of p . Using this rule, we construct

a shape optimization problem with the KS function as a cost function. The method for computing the shape derivative of the cost function is given as an adjoint variable method considering the rule for p . A solution to this new problem is presented based on the algorithm of sequential quadratic programming using the H^1 gradient method for reshaping in order to maintain the smoothness of the boundary [3–6]. The effectiveness of the rule for p is confirmed based on a numerical solution to a cantilever problem.

2. Admissible set of design variables


First, let us define the admissible set of design variable for the shape optimization problem. Let D_0 and $\Omega_0 \subset D_0$ be $d \in \{2, 3\}$ dimensional domains with Lipschitz boundaries, which are denoted by ∂D_0 and $\partial \Omega_0$. On $\partial \Omega_0$, $\Gamma_{D0} \subset \partial \Omega_0$ and $\Gamma_{N0} = \partial \Omega_0 \setminus \bar{\Gamma}_{D0}$ ($\bar{\Gamma}_{D0} = \Gamma_{D0} \cup \partial \Gamma_{D0}$) denote the Dirichlet boundary and the Neumann boundary, respectively. Moreover, let $\Gamma_{p0} \subset \Gamma_{N0}$ be a non-homogeneous Neumann boundary. We assume that D_0 and Ω_0 are fixed and that mapping $\phi : D_0 \rightarrow \mathbb{R}^d$ included in a Banach of

$$Y = W^{1,\infty}(D_0; \mathbb{R}^d) \quad (1)$$

is a design variable in the shape optimization problem. Moreover, we let

$$\mathcal{D} = \left\{ \phi \in Y \mid \begin{aligned} &\|\phi - \phi_0\|_{W^{1,\infty}(D_0; \mathbb{R}^d)} < 1, \\ &\phi(\Omega_0) \subseteq D_0, \text{ piecewise } C^2 \text{ class on } \Gamma_{p0}, \\ &\phi = \phi_0 \text{ on } \Gamma_{C0} \end{aligned} \right\} \quad (2)$$

be the admissible set of design variable ϕ , where $\Gamma_{C0} \subset \partial \Omega_0$ denotes a boundary on which domain variation


 Fig. 1. Initial domain Ω_0 and variation domain $\Omega(\phi)$.

is constrained due to design considerations. In (2), $\|\phi - \phi_0\|_{W^{1,\infty}(D_0;\mathbb{R}^d)} < 1$ is used to assure one-to-one mapping. In the present paper, we use the notation $\Omega(\phi)$ for $\{\phi(\mathbf{x}) \mid \mathbf{x} \in \Omega_0\}$ and $\partial\Omega^-(\phi)$ for the open set $\partial\Omega(\phi) \setminus \Theta(\phi)$, where $\Theta(\phi)$ denotes the set of corner points of measure 0.

3. Main problem

Using the design variable $\phi \in \mathcal{D}$, let us define the main problem as a shape optimization problem. In the present paper, we consider a linear elastic problem as the main problem. We have the following assumptions.

(H1) For $q > d$, $\mathbf{b} \in L^{2q}(D_0;\mathbb{R}^d)$, $\mathbf{p} \in W^{1,2q}(D_0;\mathbb{R}^d)$, $\mathbf{u}_D \in W^{1,2q}(D_0;\mathbb{R}^d)$, and $\mathbf{C} \in W^{1,\infty}(D_0;\mathbb{R}^{d \times d \times d \times d})$ denote the volume force, the traction force, and the given displacement and stiffness, respectively. For \mathbf{C} , we assume that there exist positive constants α and β such that $\mathbf{X} \cdot (\mathbf{C}\mathbf{X}) \geq \alpha \|\mathbf{X}\|^2$, $|\mathbf{X} \cdot (\mathbf{C}\mathbf{Y})| \leq \beta \|\mathbf{X}\| \|\mathbf{Y}\|$ for all $\mathbf{X}, \mathbf{Y} \in \{\mathbf{X} \in \mathbb{R}^{d \times d} \mid \mathbf{X} = \mathbf{X}^T\}$ and $C_{ijkl} = C_{klij}$ at almost all of D_0 .

(H2) For $\partial\Omega(\phi)$, opening angles at corner points $\Theta(\phi)$ and the boundary of mixed boundary conditions $\partial\Gamma_D(\phi)$ are less than π and $\pi/2$, respectively (see Fig. 1).

Under the assumptions, we let

$$\mathcal{S} = \left\{ \mathbf{u} \in W^{2,2q}(D_0;\mathbb{R}^d) \mid \phi \in \mathcal{D} \right\} \quad (3)$$

be the admissible set for displacement \mathbf{u} . Let $\mathbf{T}(\mathbf{u}) = \mathbf{C}\mathbf{E}(\mathbf{u})$ and $\mathbf{E}(\mathbf{u}) = \frac{1}{2}(\nabla\mathbf{u}^T + (\nabla\mathbf{u}^T)^T)$ denote the stress and strain, respectively. Moreover, we use $\boldsymbol{\nu}$ as the outer unit normal on the boundary.

Problem 1 (Linear elastic problem) For $\phi \in \mathcal{D}$, let (H1) and (H2) be satisfied. Find $\mathbf{u} \in \mathcal{S}$ such that

$$\begin{aligned} -\nabla^T \mathbf{T}(\mathbf{u}) &= \mathbf{b}^T \text{ in } \Omega(\phi), \\ \mathbf{T}(\mathbf{u})\boldsymbol{\nu} &= \mathbf{p} \text{ on } \Gamma_p^-(\phi), \\ \mathbf{T}(\mathbf{u})\boldsymbol{\nu} &= \mathbf{0} \text{ on } \Gamma_N^-(\phi) \setminus \bar{\Gamma}_p(\phi), \\ \mathbf{u} &= \mathbf{u}_D \text{ on } \Gamma_D(\phi). \end{aligned}$$

For use in Section 5, we here define the Lagrange function for the main problem (Problem 1) as

$$\mathcal{L}_M(\phi, \mathbf{u}, \mathbf{v}) = \int_{\Omega(\phi)} (-\mathbf{T}(\mathbf{u}) \cdot \mathbf{E}(\mathbf{v}) + \mathbf{b} \cdot \mathbf{v}) dx$$

$$\begin{aligned} &+ \int_{\Gamma_N(\phi)} \mathbf{p} \cdot \mathbf{v} d\gamma + \int_{\Gamma_D^-(\phi)} \{(\mathbf{u} - \mathbf{u}_D) \cdot \mathbf{T}(\mathbf{v})\boldsymbol{\nu} \\ &+ \mathbf{v} \cdot \mathbf{T}(\mathbf{u})\boldsymbol{\nu}\} d\gamma, \end{aligned} \quad (4)$$

where $\mathbf{v} \in \mathcal{S}$ is introduced as the Lagrange multiplier. With $\mathcal{L}_M(\phi, \mathbf{u}, \mathbf{v})$, if \mathbf{u} is the solution of Problem 1, then

$$\mathcal{L}_M(\phi, \mathbf{u}, \mathbf{v}) = 0$$

holds for all $\mathbf{v} \in \mathcal{S}$.

4. Shape optimization problem

Using the solution \mathbf{u} of Problem 1 for $\phi \in \mathcal{D}$, we define the cost functions as follows. In the present paper, we are attempting to construct a cost function for the strength of a linear elastic body. Here, we let $\sigma : \mathbb{R}^d \rightarrow \mathbb{R}$ be a function of \mathbf{u} representing a measure of strength. In the present paper, we use the von Mises stress for the measure given by

$$\sigma(\mathbf{u}) = \sqrt{\frac{3}{2} \mathbf{T}_D(\mathbf{u}) \cdot \mathbf{T}_D(\mathbf{u})},$$

where $\mathbf{T}_D(\mathbf{u})$ denotes the deviator stress, which is defined as

$$\mathbf{T}_D(\mathbf{u}) = \mathbf{T}(\mathbf{u}) - \frac{1}{3} \text{tr}(\mathbf{T}(\mathbf{u})) \mathbf{I},$$

and \mathbf{I} denotes the unit tensor.

As a cost function of strength, we set the objective function as follows:

$$f_0(\phi, \mathbf{u}, p) = \frac{1}{p} \ln \left\{ \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} dx}{\int_{\Omega(\phi)} dx} \right\}. \quad (5)$$

In (5), $p \in (0, \infty)$ is assumed to be a constant in the previous papers [1, 2]. However, in the present paper, we assume that

$$p = \frac{\int_{\Omega(\phi)} dx}{\int_{\Omega(\phi)} \sigma(\mathbf{u}) dx} - \frac{1}{c_0} \quad (6)$$

holds, where c_0 denotes a positive constant, which indicates $\max_{\mathbf{x} \in \Omega_0} \sigma(\mathbf{u}(\mathbf{x}))$ with the solution \mathbf{u} of Problem 1 for Ω_0 . Moreover, p is considered to be the deviation of the inverse of the maximum value of the strength measure from the inverse of the average value of the strength measure. In this sense of p , the index $p\sigma(\mathbf{u})$ in (5) refers to a normalized index for the deviation of the strength measure.

On the other hand, as a cost function that has a trade-off relation with respect to f_0 , we define the following constraint function for the mass:

$$f_1(\phi) = \int_{\Omega(\phi)} \rho dx - c_1, \quad (7)$$

where $\rho \in W^{1,\infty}(D_0;\mathbb{R})$ is the density, and c_1 is a positive constant such that there exists some $\phi \in \mathcal{D}$ that satisfies $f_1(\phi) < 0$.

Using the cost functions, we construct the shape op-

timization problem as follows.

Problem 2 (Strength maximization problem)

Let $f_0(\phi, \mathbf{u}, p)$ and $f_1(\phi)$ be defined in (5) and (7), respectively. Find ϕ such that

$$\min_{\phi \in \mathcal{D}} \{ f_0(\phi, \mathbf{u}, p) \mid f_1(\phi) \leq 0, \mathbf{u} \in \mathcal{S}, \text{ Problem 1 and (6)} \}.$$

5. Shape derivative of the cost functions

Let $\varphi \in Y$ be the domain variation from ϕ . We refer to the Fréchet derivatives of f_0 and f_1 with respect to arbitrary $\varphi \in Y$ as the shape derivatives, and we denote these derivatives as $f'_0(\phi, \mathbf{u}, p)[\varphi, \mathbf{u}', p']$ and $f'_1(\phi)[\varphi]$, respectively, where \mathbf{u}' and p' denote the variations of \mathbf{u} and p , respectively, caused by φ that satisfy Problem 1 and (6).

The shape derivative of f_1 is obtained using the formula of the shape derivative for the domain integral [7] as

$$f'_1(\phi)[\varphi] = \langle \mathbf{g}_1, \varphi \rangle = \int_{\partial\Omega(\phi)} \rho \boldsymbol{\nu} \cdot \varphi \, d\gamma. \quad (8)$$

On the other hand, the shape derivative of f_0 is obtained as follows. Let

$$\mathcal{L}_0(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0) = f_0(\phi, \mathbf{u}, p) + q_0 \left\{ p + \frac{1}{c_0} - \frac{\int_{\Omega(\phi)} dx}{\int_{\Omega(\phi)} \sigma(\mathbf{u}) \, dx} \right\} + \mathcal{L}_M(\phi, \mathbf{u}, \mathbf{v}_0)$$

be the Lagrangian for f_0 , where $\mathbf{v}_0 \in \mathcal{S}$ and $q_0 \in \mathbb{R}$ are introduced as Lagrange multipliers. The shape derivative of $\mathcal{L}_0(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)$ is written as follows:

$$\begin{aligned} \mathcal{L}'_0(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\varphi, \mathbf{u}', p'] &= \mathcal{L}_{0\phi}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\varphi] + \mathcal{L}_{0\mathbf{u}}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\mathbf{u}'] \\ &+ \mathcal{L}_{0\mathbf{v}_0}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\mathbf{v}'_0] + \mathcal{L}_{0p}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[p'] \\ &+ \mathcal{L}_{0q_0}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[q'_0]. \end{aligned} \quad (9)$$

Here, if \mathbf{u} is the solution to Problem 1 and p is determined by (6), then the third and fifth terms in the right-hand side of (9) become 0.

The fourth term in the right-hand side of (9) is calculated as

$$\mathcal{L}_{0p}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[p'] = \left\{ -\frac{1}{p^2} \ln \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx}{\int_{\Omega(\phi)} dx} + \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \sigma(\mathbf{u}) \, dx}{p \int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx} + q_0 \right\} p'.$$

Then, the fourth term becomes 0, if q_0 is determined by

$$q_0 = \frac{1}{p^2} \ln \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx}{\int_{\Omega(\phi)} dx} - \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \sigma(\mathbf{u}) \, dx}{p \int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx}. \quad (10)$$

Moreover, the second term in the right-hand side of (9) is calculated as

$$\begin{aligned} \mathcal{L}_{0\mathbf{u}}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\mathbf{u}'] &= \frac{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \frac{\partial \sigma(\mathbf{u})}{\partial \mathbf{T}(\mathbf{u})} \cdot \mathbf{T}(\mathbf{u}') \, dx}{\int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx} \\ &+ q_0 \frac{\int_{\Omega(\phi)} dx \int_{\Omega(\phi)} \frac{\partial \sigma(\mathbf{u})}{\partial \mathbf{T}(\mathbf{u})} \cdot \mathbf{T}(\mathbf{u}') \, dx}{\left(\int_{\Omega(\phi)} \sigma(\mathbf{u}) \, dx \right)^2} \\ &+ \mathcal{L}_M(\phi, \mathbf{u}', \mathbf{v}_0) \\ &= \int_{\Omega(\phi)} \boldsymbol{\Sigma}(\mathbf{u}, p, q_0) \cdot \mathbf{T}(\mathbf{u}') \, dx \\ &+ \mathcal{L}_M(\phi, \mathbf{u}', \mathbf{v}_0). \end{aligned} \quad (11)$$

Then, the second term becomes 0 if \mathbf{v}_0 is the solution to the following adjoint problem.

Problem 3 (Adjoint problem for f_0) Let \mathbf{u} be the solution to Problem 1, and let p and q_0 be given by (6) and (10), respectively. Find $\mathbf{v}_0 \in \mathcal{S}$ such that

$$\begin{aligned} -\nabla^T \mathbf{T}(\mathbf{v}_0) &= -\nabla^T \boldsymbol{\Sigma}(\mathbf{u}, p, q_0) \text{ in } \Omega(\phi), \\ \mathbf{T}(\mathbf{v}_0) \boldsymbol{\nu} &= \mathbf{0} \text{ on } \Gamma_p^-(\phi), \\ \mathbf{T}(\mathbf{v}_0) \boldsymbol{\nu} &= \mathbf{0} \text{ on } \Gamma_N^-(\phi) \setminus \bar{\Gamma}_p(\phi), \\ \mathbf{v}_0 &= \mathbf{0} \text{ on } \Gamma_D(\phi), \end{aligned}$$

where $\boldsymbol{\Sigma}(\mathbf{u}, p, q_0)$ is defined in (11).

Considering the above conditions, if we use the solutions of \mathbf{u} and \mathbf{v}_0 of Problem 1 and Problem 3, respectively, and p and q_0 are determined by (6) and (10), respectively, then (9) becomes

$$\begin{aligned} \mathcal{L}'_{0\phi}(\phi, \mathbf{u}, \mathbf{v}_0, p, q_0)[\varphi] &= f'_0(\phi, \mathbf{u}, p)[\varphi] \\ &= \int_{\partial\Omega^-(\phi)} \zeta_{\partial\Omega} \boldsymbol{\nu} \cdot \varphi \, d\gamma + \int_{\Gamma_D^-(\phi)} \zeta_D \boldsymbol{\nu} \cdot \varphi \, d\gamma \\ &+ \int_{\Gamma_N^-(\phi)} (\varphi \cdot \nabla \zeta_N + \kappa \zeta_N) \boldsymbol{\nu} \cdot \varphi \, d\gamma \\ &+ \int_{\partial\Gamma_N(\phi) \cup \Theta(\phi)} \zeta_N \boldsymbol{\tau} \cdot \varphi \, d\varsigma \\ &= \langle \mathbf{g}_0, \varphi \rangle \end{aligned} \quad (12)$$

where

$$\zeta_{\partial\Omega} = \frac{-1}{p \int_{\Omega(\phi)} dx} + \frac{e^{p\sigma(\mathbf{u})}}{p \int_{\Omega(\phi)} e^{p\sigma(\mathbf{u})} \, dx}$$

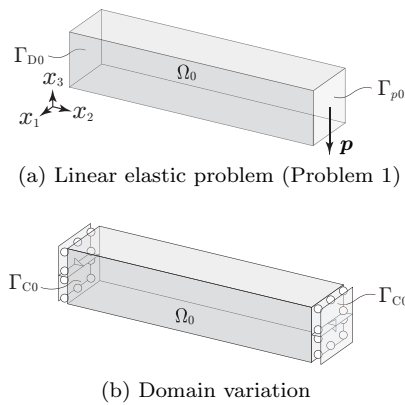


Fig. 2. Boundary conditions in the cantilever problem

$$\begin{aligned}
 & +g_0 \left\{ \frac{\sigma(\mathbf{u}) \int_{\Omega(\phi)} dx}{\left(\int_{\Omega(\phi)} \sigma(\mathbf{u}) dx \right)^2} - \frac{1}{\int_{\Omega(\phi)} \sigma(\mathbf{u}) dx} \right\} \\
 & - \mathbf{T}(\mathbf{u}) \cdot \mathbf{E}(\mathbf{v}_0) + \mathbf{b} \cdot \mathbf{v}_0 \\
 \zeta_D &= \partial_\nu(\mathbf{u} - \mathbf{u}_D) \cdot (\mathbf{T}(\mathbf{v}_0) \boldsymbol{\nu}) + \partial_\nu \mathbf{v}_0 \cdot (\mathbf{T}(\mathbf{u}) \boldsymbol{\nu}) \\
 \zeta_N &= \mathbf{p} \cdot \mathbf{v}_0
 \end{aligned}$$

in which $\boldsymbol{\tau}$ denotes the outer unit tangent of $\Gamma_N^-(\phi)$ for $d = 2$ and the outer unit tangent of $\Gamma_N^-(\phi)$ and the outer unit normal of $\partial\Gamma_N(\phi) \cup \Theta(\phi)$ for $d = 3$, and $\boldsymbol{\kappa} = \nabla \cdot \boldsymbol{\nu} D$

6. Solution

The algorithm for solving Problem 2 based on the sequential quadratic programming is shown in previous papers [5,6]. In this algorithm, the H^1 gradient method is used for reshaping with shape derivatives \mathbf{g}_0 and \mathbf{g}_1 in (12) and (8), respectively.

7. Numerical example

We developed a program based on an algorithm using the finite element method. Using this program, we solved a strength maximization problem of the cantilever as shown in Fig. 2. We assumed $\Omega_0 = (0, 1) \times (0, 5) \times (0, 1)$, $\mathbf{p} = (0, 0, -1)^T \psi$ with basis function ψ for the node at the center of $\Gamma_p(\phi)$, and $\mathbf{u}_D = \mathbf{0}$ on $\Gamma_D(\phi)$, as shown in Fig. 2(a). The stiffness \mathbf{C} was constructed with a Young’s modulus of 7.1×10^{10} and a Poisson’s ratio of 0.33. In the domain variation, we assumed that the normal direction on Γ_{C0} in Fig. 2(b), the vertical direction on the center lines of Γ_{C0} , and the horizontal direction at the center points of Γ_{C0} were constrained. The finite element model of the cantilever was made with the P2 element.

The initial and optimized finite element models colored according to von Mises stress are shown in Fig. 3. The results indicate that the maximum value of the von Mises stress is reduced. The iteration histories of cost functions f_0 and f_1 normalized with the initial value $f_{0\text{init}}$ and c_1 , respectively, are shown in Fig. 4. In this figure, the plots labeled “ p in (6)” are the results obtained by the present method. Using the present method, p was

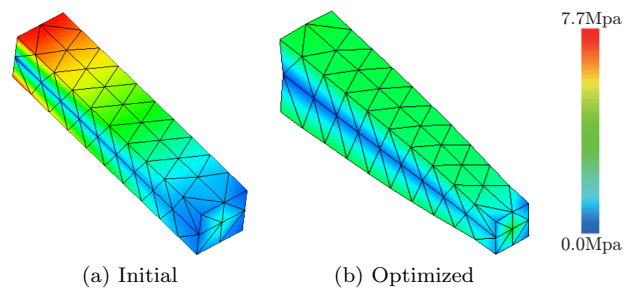


Fig. 3. Finite element models with meshes colored according to von Mises stress

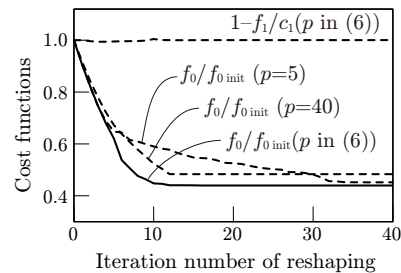


Fig. 4. Iteration histories of cost functions with respect to reshaping

found to be 6.96 for the initial shape and 6.18 for the 40th iteration of reshaping. Compared with the shown results obtained using fixed values of p of 5 and 40, the result obtained using the present method have good convergence properties.

Acknowledgments

The present study was supported by JSPS KAKENHI (20540113).

References

- [1] G. Kreisselmeier and R. Steinhauser, Application of vector performance optimization to a robust control loop design for a fighter aircraft, *International Journal of Control*, **37**(2) (1983), 251–284.
- [2] M. Shimoda, H. Azegami, and T. Sakurai, Numerical solution for min-max problems in shape optimization: Minimum design of maximum stress and displacement, *JSME International Journal Series A*, **41**(1) (1998), 1–9.
- [3] H. Azegami, Solution to domain optimization problems (in Japanese), *Trans. JSME, Ser. A*, **60** (1994), 1479–1486.
- [4] H. Azegami and K. Takeuchi, A smoothing method for shape optimization: traction method using the Robin condition, *Int. J. Comput. Methods*, **3**(1) (2006), 21–33.
- [5] H. Azegami, S. Fukumoto, and T. Aoyama, Shape optimization of continua using NURBS as basis functions, *Structural and Multidisciplinary Optimization*, **47**(2) (2013), 247–258.
- [6] D. Murai and H. Azegami, Error analysis of H1 gradient method for shape-optimization problems of continua, *JSIAM Letters*, **3** (2013), 29–32.
- [7] J. Sokolowski and J. P. Zolésio, *Introduction to Shape Optimization: Shape Sensitivity Analysis*, Springer-Verlag, New York, 1992.